

JYOTHISHMATHI INSTITUTE OF TECHNOLOGY & SCIENCE Nustulapur, Karimnagar - 505481


(Approved by AICTE, New Delhi & Affiliated to JNTUH)

DESIGN OF MACHINE MEMBERS-II BELTS, CHAINS AND GEARS


BY


R.CHANDANA ASST PROF(MECH DEPT) III BTECH II SEM 2018-19

FLAT BELT DRIVES WITH PARALLEL SHAFTS

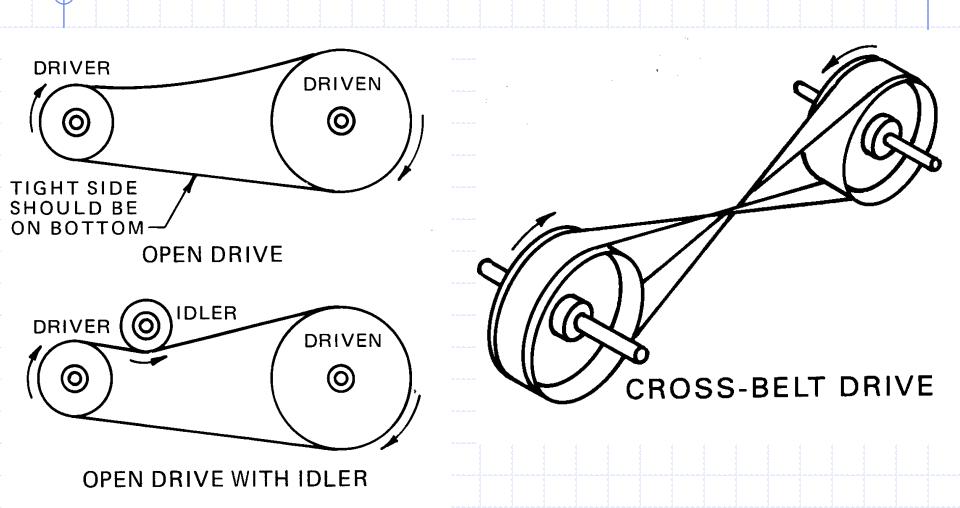


FLAT BELT DRIVES WITH PERPENDICULAR SHAFTS

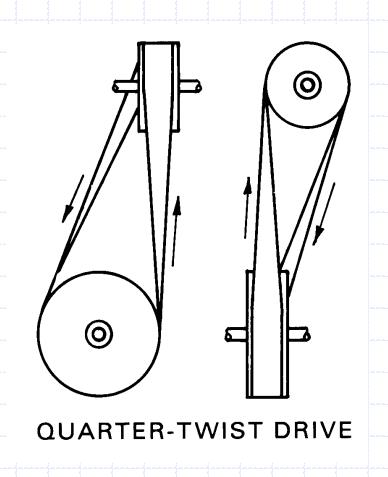


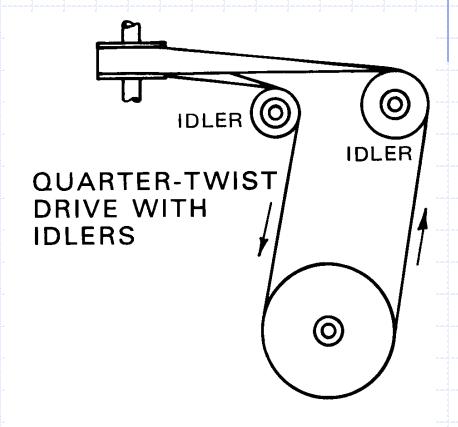


CROWN ON PULLEY

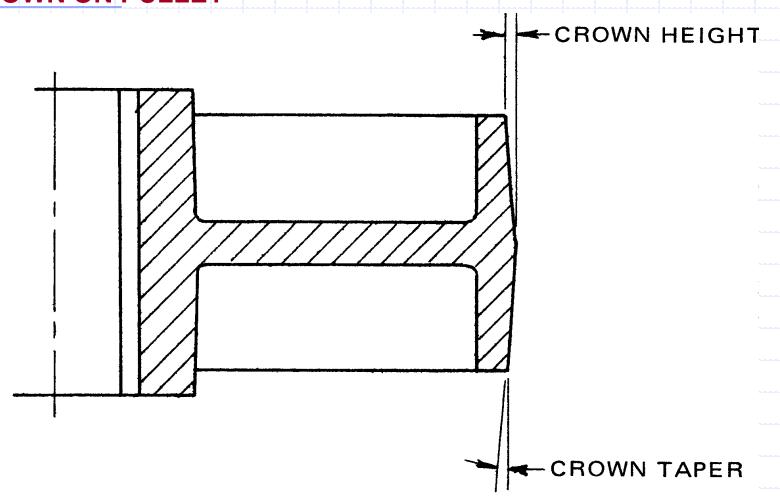


V-BELT AND PULLEY

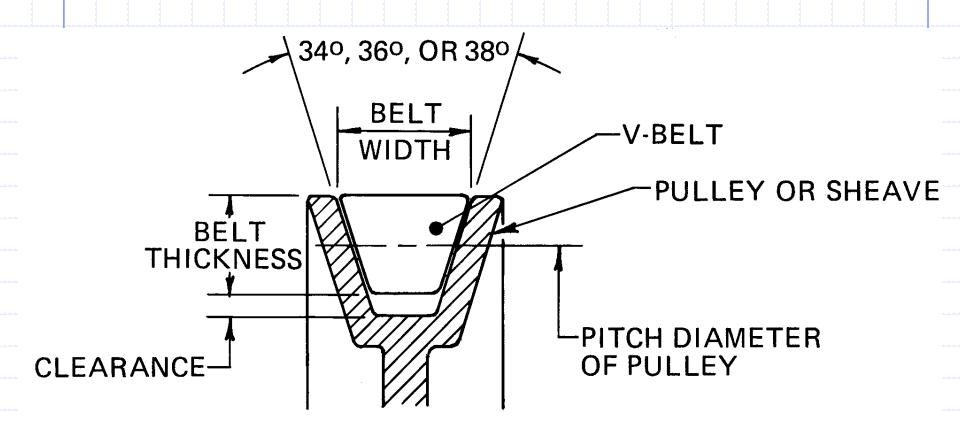

LOCATION OF IDLER PULLEYS

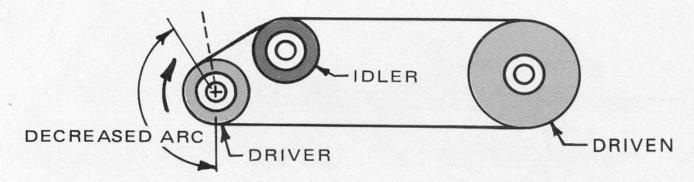


(A) INSIDE IDLER PULLEY, AT LEAST AS LARGE AS THE SMALL SHEAVE, ON THE SLACK SIDE OF THE DRIVE

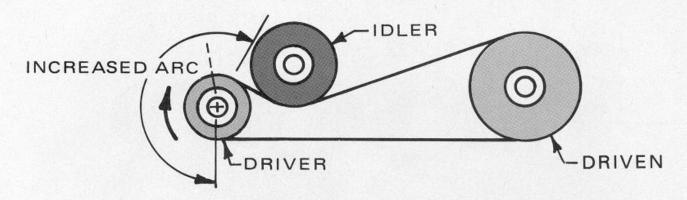


(B) OUTSIDE IDLER PULLEY, AT LEAST 1.3 LARGER THAN THE SMALL SHEAVE

LOCATION OF IDLER PULLEYS

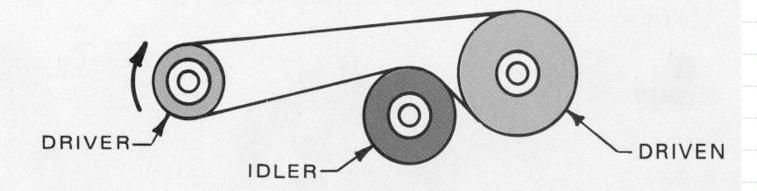



(C) OUTSIDE IDLER PULLEY ON THE TIGHT SIDE OF THE DRIVE

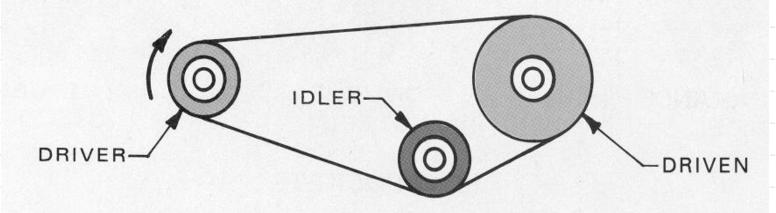

(D) INSIDE IDLER PULLEY ON THE TIGHT SIDE OF THE DRIVE

ROLLER CHAIN TERMINOLOGY

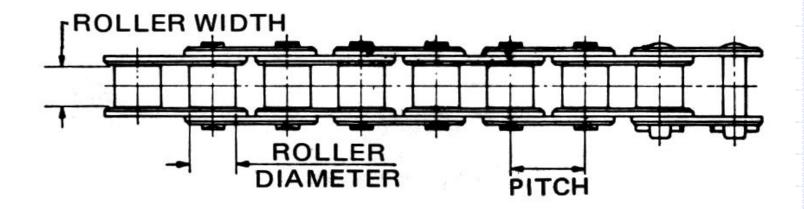


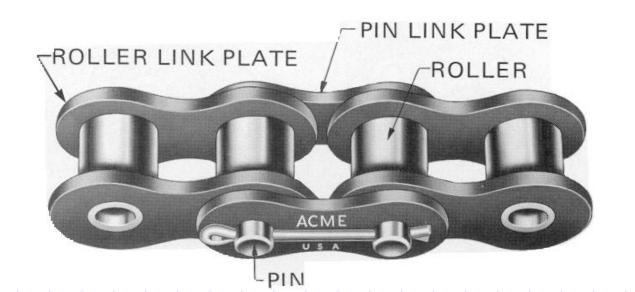

SPROCKETS



SINGLE

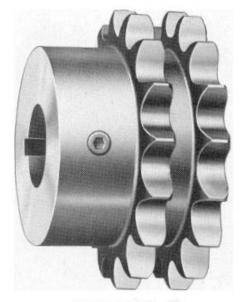


DOUBLE




DOUBLE CAST IRON


CHAIN DRIVE WITH LONG CENTER DISTANCE

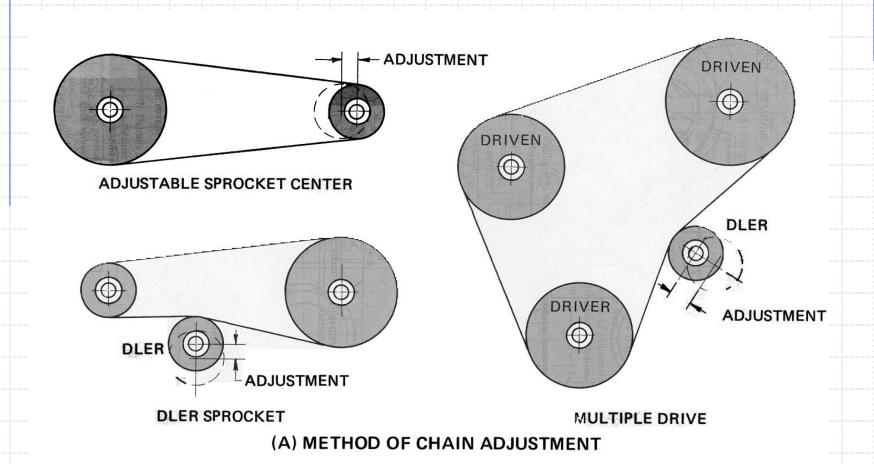


GEAR-TEETH TERMS

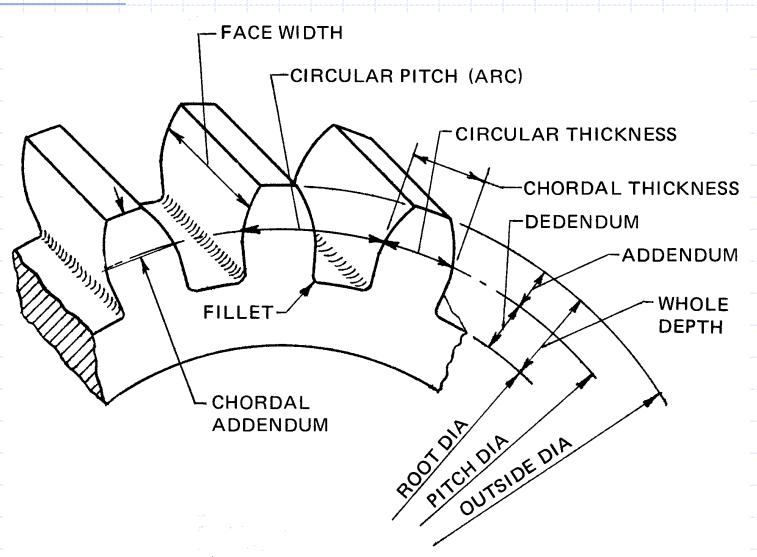


MESHING OF GEAR TEETH

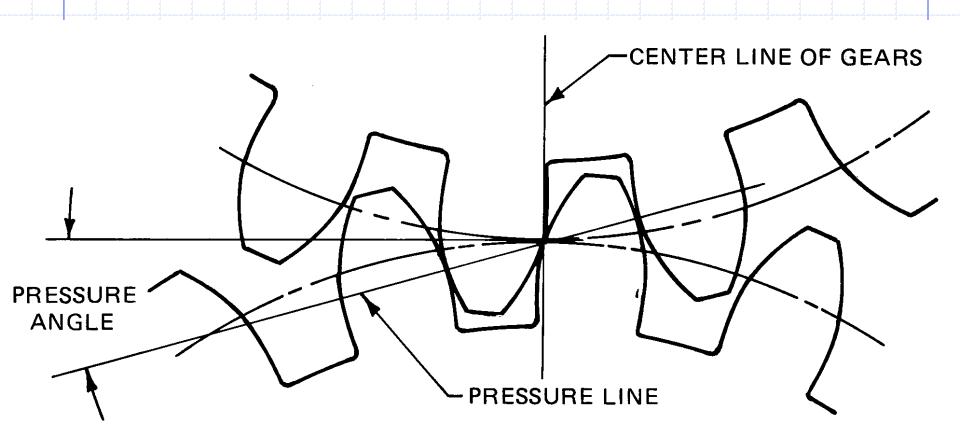


WORKING DRAWING OF A SPUR GEAR

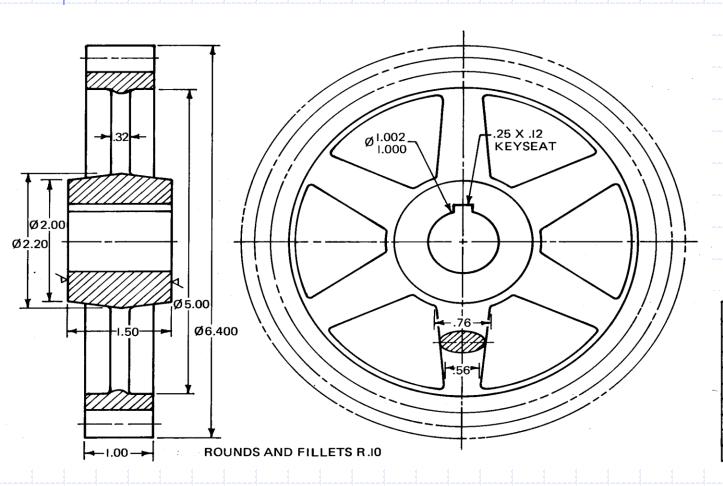

CUTTING DATA	
NUMBER OF TEETH	30
PITCH DIAMETER	6.000
DIAMETRAL PITCH	5
PRESSURE ANGLE	25º
WHOLE DEPTH	.431
CHORDAL ADDENDUM	.204
CHORDAL THICKNESS	.300
CIRCULAR THICKNESS	.314
WORKING DEPTH	.400

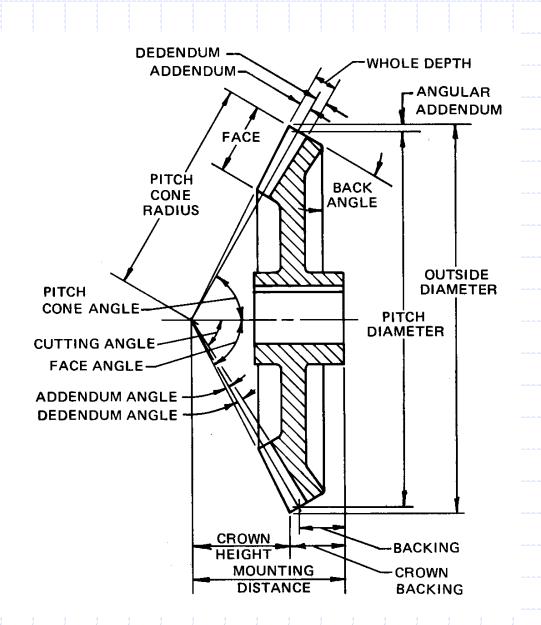


BEVEL GEAR NOMENCLATURE

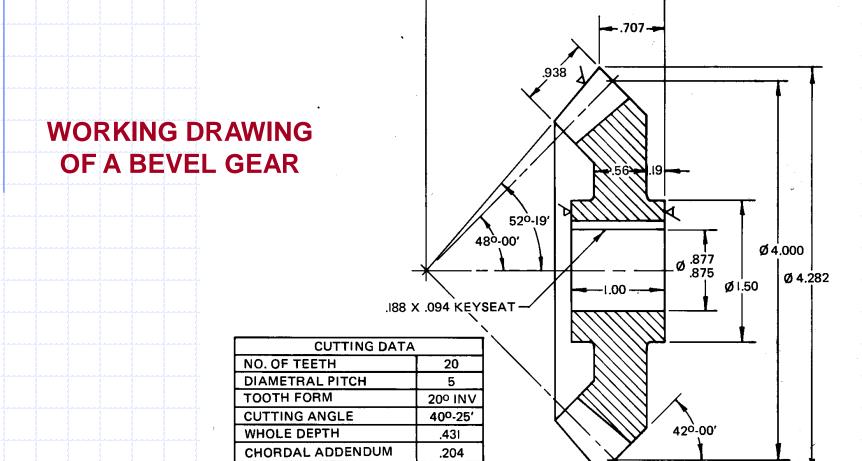


.314

CHORDAL THICKNESS

2.563

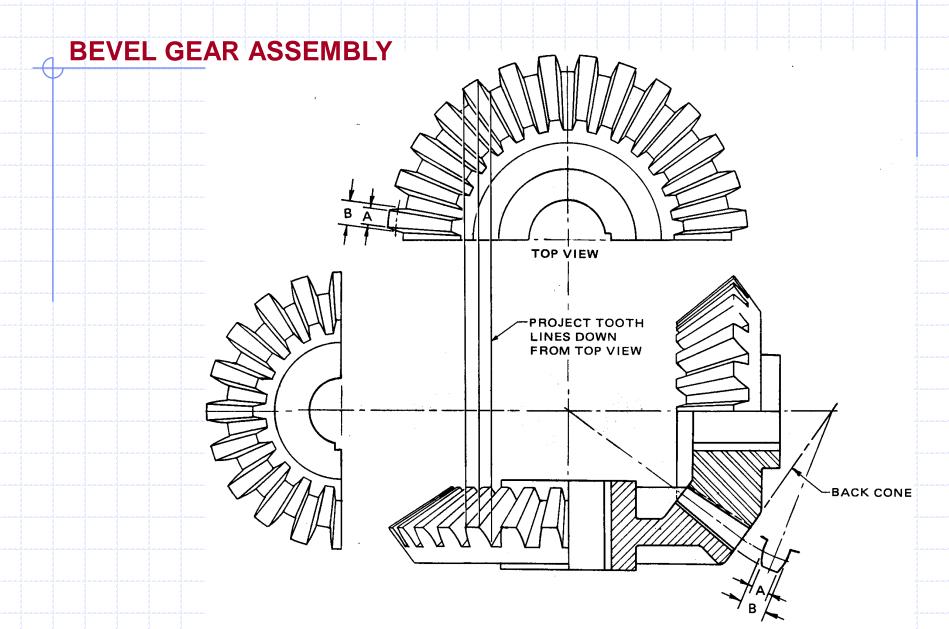


WORM GEARS AND WORMS

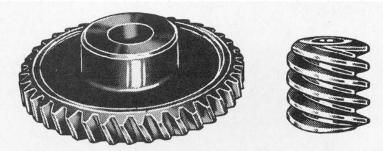

THREADS OF LEFT HAND LEAN TO THE LEFT WHEN STANDING ON EITHER END

(A) LEFT-HAND WORM GEAR AND WORM

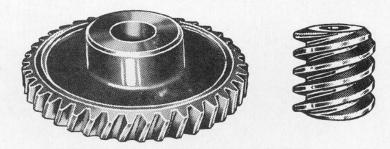


THREADS OF RIGHT HAND LEAN TO THE RIGHT WHEN STANDING ON EITHER END

(B) RIGHT-HAND WORM GEAR AND WORM

WORKING DRAWING OF A WORM AND WORM GEAR

CUTTING DATA		
NO. OF TEETH	36	
ADDENDUM	.159	
WHOLE DEPTH	.343	
NO. OF THREADS	2	
PITCH (AXIAL)	.500	
PRESSURE ANGLE	200	
LEAD ANGLE	70-53′	
LEAD-RH		

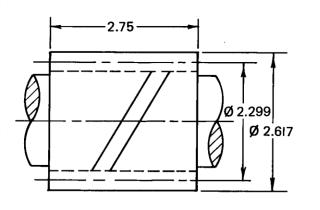

CUTTING DATA		
NO. OF THREADS	2	
PITCH	.500	
PRESSURE ANGLE	200	
LEAD ANGLE	70-53'	
LEAD-RH		
WHOLE DEPTH	.343	
ADDENDUM	.159	

